

LED GU10GL



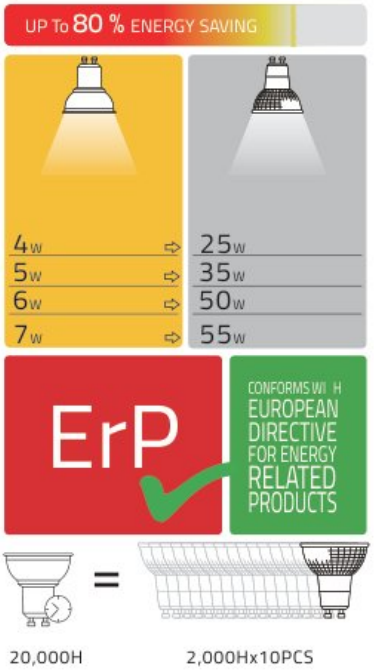

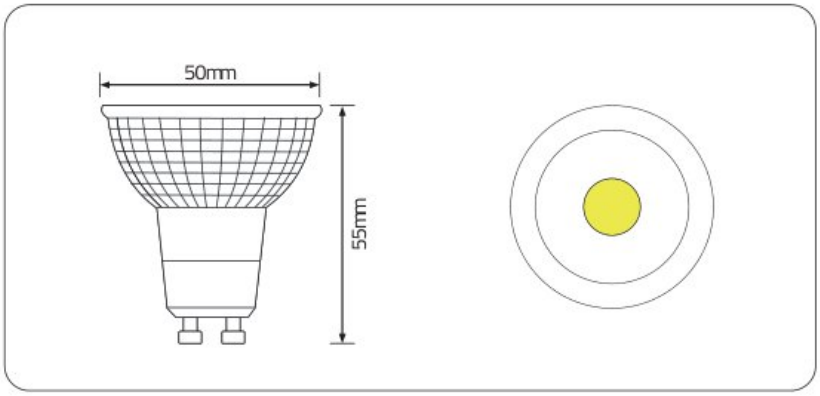

Key Materials

- Sanan chip, Honglitronic packed SMD2835
- Glass body & ceramic holder
- Built-in constant current LED driver

Options

- 110/220V with RC/Linear IC, 175-265V with IC driver

Applications

- Hotels, restaurants, bars, cafes
- Lobbies, corridors, stairwells, reception areas etc

SPECIFICATION

3000K / 4000K / 6000K

Code No.	Voltage	Power	Lumen	CRI	PF	EMC
RO-GU10-4	170-240V	4W	320lm	80	0.5	Option
RO-GU10-5	170-240V	5W	400lm	80	0.5	Option
RO-GU10-6	170-240V	6W	480lm	80	0.5	Option
RO-GU10-7	170-240V	7W	560lm	80	0.5	Option

Photometric Data

HX-S5GL-GU10

