
NEON FLEX STRIP

RO-NFT1616 Top Bend



Feature

Top bending design, uniform light, Suitable for indoor and outdoor decorative lighting, architectural outline lighting, etc

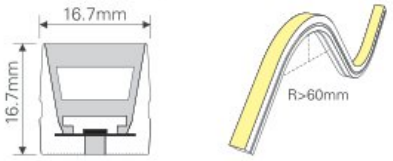



UV Protected | Saltwater | IP6X | IP67 | DC 24V | Ra 90 | 1 BIN | LM 80 | CE | 3 years

Electrical & Output Data

Model No.	RO-NFT1616-5000-24
Step length	50mm
Voltage (v)	24V
CRI	Ra90
Color	2100K 2700K 3000K 3500K 4000K 5000K
Power (w/m)	12W
Standard length (m)	5m / 30m
Min. Bending	R>60mm
IP rate	67

luminance Distribution







Light effciency & Lumen Output

Voltage	Power	CRI	Color	Lumem	Luminaire Efficiency
24V	12W	Ra90	2100K	514lm/m	43lm/W
			2700K	535lm/m	45lm/W
			3000K	558lm/m	47lm/W
			3500K	582lm/m	49lm/W
			4000K	596lm/m	50lm/W
			5000K	588lm/m	49lm/W


Optional end cap and outlet




IP67 end cap
(Outlet from end)



IP67 end cap
(Outlet from side)



IP67 end cap
(Outlet from bottom)



IP67 Integrated end cap
(Outlet from bottom)

Accessories



Aluminum profile
L1000*W17.5*H18.9mm



Bendable profile
L1000*W17.85*H16.45mm



Mounting Clips
L30*W17.5*H18.9mm



Screw
PWA3*10



End cap / outlet from end
L28*W19*H19mm



End cap / outlet from bottom
L19*W18*H29mm



End cap / without hole
L19*W19*H15mm



Wires



Silicone glue
10ml / pcs



End cap / outlet from side
L19*W18*H29mm