
Spec guide




Double-row led



Single-row led



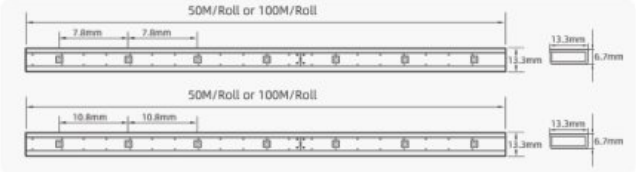

220V AC | RoHS | CE | IP20

Specifications			
Product Name	Double-0.25M-12W	Single-0.5M-10W	Single-1M-10W
Segment Cut Length	0.25 meter	0.5 meter	1 meter
Power	12W/M	10W/M	10W/M
Lumens	1100lm/M Ra>80	800lm/M Ra>80	800lm/M Ra>80
CCT	3000K/4000K/6000K		
Beam Angle	120°		
IP Grade	Strip IP65 + Caps&Connectors IP20, for indoor use only		
Voltage	AC220-240V		
Driver	Flicker free driver or low-cost flicker driver		
LED chip isolation	NO	YES (see remark)	YES (see remark)
Material	Copper lead-frame + copper wire + PVC housing		
Total Length	50 meters/roll or 100 meters/roll; Max 50 meters for 1 driver		
Life Span	35,000hrs		
Warranty	2 years		
Operating Temperature	-20°C~+50°		
Application	Indoor		
Dimmable	Optional		
Mechanical			
Dimension	H7×15.5mm	H6.7×13.3mm	H6.7×13.3mm
Number of LEDs	2835 LED, 120 pcs/meters		
LED Pitch	16.5mm	7.8mm without resistance / 10.8mm with resistance	
Carton Size of 50 M/roll	32×32×16 CM	32×32×16 CM	32×32×16 CM
Gross weight of 50 M/roll	6 KG	5 KG	5 KG
MOQ	5000 meters per model		

Remark:
LED chip isolation means when 1 chip breaks, other chips in same group still work.